


Ball bearings



• R Series Inch dimensions

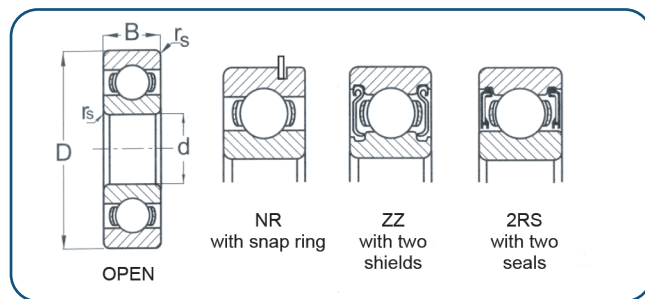

d	D	B		Mass (kg) open type	Designation
		open	Shielded		
	In.				
0,040	1/8	0,0469	-	-	R09
3/64	5/32	0,0626	0,0937	0,09	R0
0.055	3/16	0,0780	0,1094	0,17	R1
5/64	1/4	0,0937	0,1406	0,35	R1-4
3/32	3/16	0,0626	0,0937	0,12	R133
3/32	5/16	0,1094	0,1406	0,50	R1-5
1/8	1/4	0,0937	0,0937	0,27	R144
1/8	5/16	0,1094	0,1406	1,00	R2-5
1/8	3/8	0,1094	0,1406	1,00	R2-6
1/8	3/8	0,1563	0,1543	1,50	R2
1/8	1/2	0,1720	0,1720	3,20	R2A
5/32	5/16	0,1094	0,1252	0,50	R155
3/16	5/16	0,1094	0,1252	0,50	R156
3/16	3/8	0,1252	0,1252	1,00	R166
3/16	1/2	0,1563	0,1961	2,30	R3
3/16	1/2	0,1961	0,1961	2,70	R3A
1/4	3/8	0,1252	0,1252	0,50	R168
1/4	1/2	0,1252	0,1874	1,80	R188
1/4	5/8	0,1961	0,1961	4,50	R4
1/4	3/4	0,2189	0,2811	7,70	R4A
3/8	7/8	0,2189	0,2811	11,00	R6
1/2	1-1/8	0,2500	0,3126	18,00	R8
5/8	1-3/8	0,2181	0,3437	37,00	R10
3/4	1-5/8	0,3126	0,4374	47,00	R12
7/8	1-7/8	0,3752	0,5000	71,00	R14
1	2	0,3752	0,5000	85,00	R16
1-1/8	2-1/8	0,3752	0,5000	90,00	R18
1-1/4	2-1/4	0,3752	0,5000	95,00	R20
1-3/8	2-1/2	0,4374	0,5626	106,00	R22
1-1/2	2-5/8	0,4374	0,5626	141,00	R24