


Disc Harrow Bearings



- Square Bore – Non-relubricatable

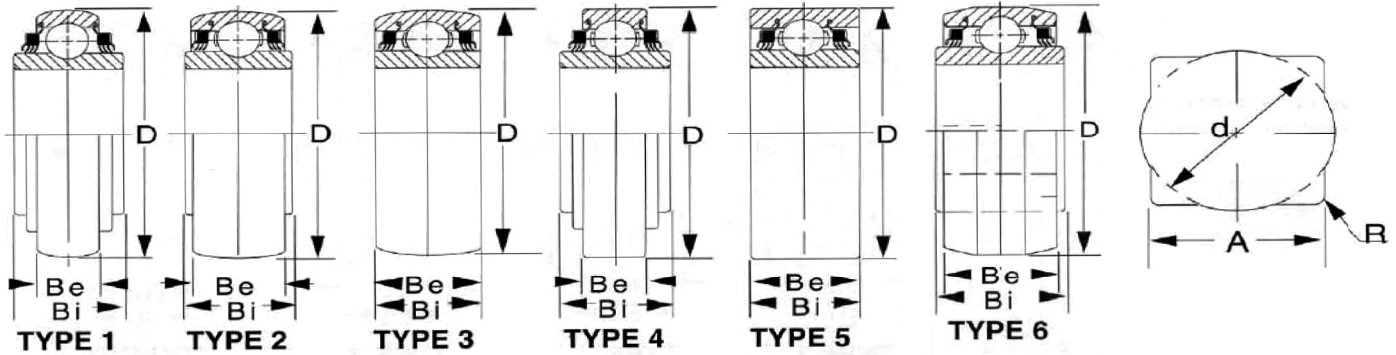

Designation	Type	Dimensions				Basic load ratings		Mass kg
		Shaft d	O.D. D	Width		dynamic C	static Co	
				Inner ring Bi	Outer ring Be			
mm						kN		
W208PP5	4	28,6	80	36,51	18	36,8	19,9	0,68
W208PPB5	1	28,6	80	36,53	18	36,8	19,9	0,67
W208PP6	4	25,4	80	36,51	18	36,8	19,9	0,73
W208PPB6	1	25,4	80	36,53	18	36,8	19,9	0,72
W208PP8	4	28,6	80	36,51	30,18	36,8	19,9	0,75
W208PPB8	2	28,6	80	36,53	30,18	36,8	19,9	1,65
W208PPB9	2	25,4	80	36,53	30,18	36,8	19,9	1,74
W208PPB11	6	22,2	87	36,53	30,18	36,8	19,9	2,05
W208PPB12	6	28,6	87	36,53	30,18	36,8	19,9	1,87
W208PPB13	1	22,2	80	36,53	18	36,8	19,9	0,74
W208PPB18	6	22,2	87	36,53	30,18	36,8	19,9	2,05
W208PPB19	6	28,6	87	36,53	30,18	36,8	19,9	1,87
W209PPB5	2	31,8	85	36,53	30,18	36,8	20,2	0,79
W209PPB7	6	31,8	87	36,53	30,18	36,8	20,2	1,85
W209PPB8	1	31,8	85	36,53	19	36,8	20,2	1,65
W210PP4	5	28,6	90	30,18	30,18	39,9	23	0,95
W210PPB4	3	28,6	90	30,18	30,18	39,9	23	0,96
W210PPB6	2	28,6	90	36,53	30,18	39,9	23	1,02
W211PP3	5	38,1	100	33,34	33,34	48,8	29	1,27
W211PPB3	3	38,1	100	33,34	33,34	48,8	29	1,21
W211PP5	4	38,1	101,6	44,45	36,52	48,8	29	1,58
W211PPB6	6	38,1	104,78	44,45	36,53	48,8	29	1,84